

## the world of heat


### model B5TO30K

### compact bithermic 5 oval pipes D30x15


Valmex realizes customized solutions according to customer's needs



## data sheet

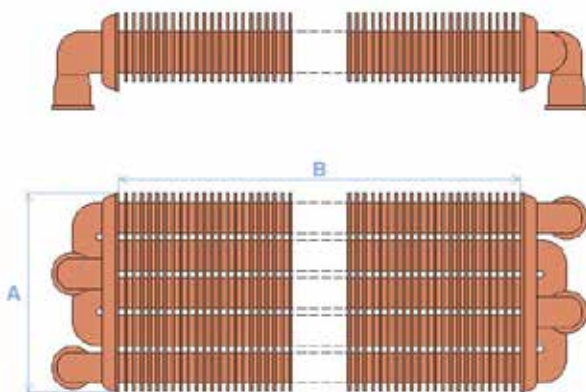

Code 0408021007




Code 0408021008



Code 0408021009



Code 0408021010



### STANDARD MODELS

OVERALL DIMENSIONS (A)	OVERALL DIMENSIONS (B)	FINS NUMBER	THERMAL OUTPUT (MAX)
180 mm	225 mm	74-83	24 kW

### FUNCTIONAL CHARACTERISTICS

MAXIMUM WORKING PRESSURE (HEATING)	bar	3
MAXIMUM WORKING TEMPERATURE (HEATING)	°C	93
MAXIMUM WORKING PRESSURE (SANITARY)	bar	8
MAXIMUM WORKING TEMPERATURE (SANITARY)	°C	90
MINIMUM DISTANCE FROM THE BURNER	mm	140
SURFACE TREATMENT	painted with silicone-aluminium mixture	

Many types of connections are available to satisfy your requests. Please don't hesitate to contact Valmex for connections or to customize your heat exchanger.