

## the world of heat



model  
**M6TO26**

**monothermic 6 oval  
pipes D26.6x13.6**

Valmex realizes customized solutions  
according to customer's needs



## data sheet

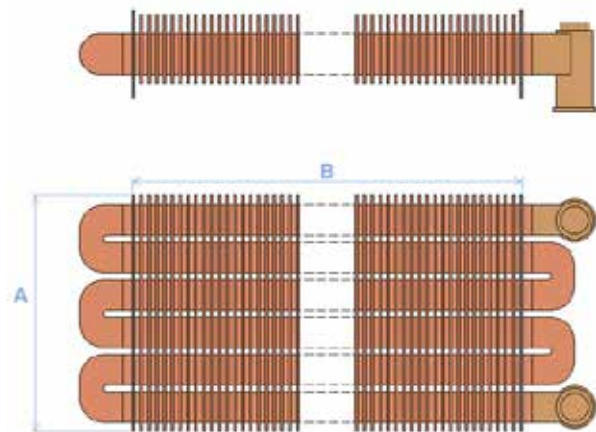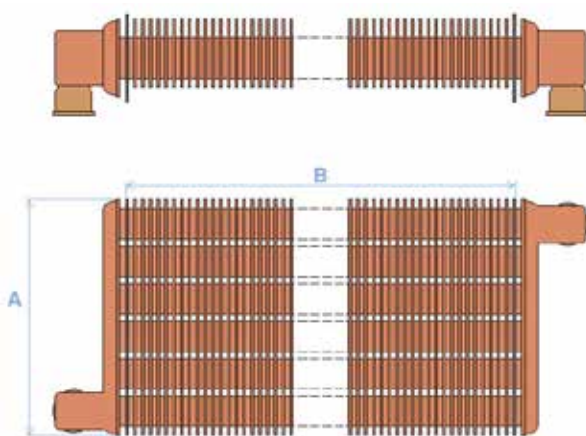

### STANDARD MODELS

OVERALL DIMENSIONS (A)	OVERALL DIMENSIONS (B)	FINS NUMBER	THERMAL OUTPUT (MAX)
180 mm	260-270 mm	86-99	28 kW
180 mm	290-295 mm	88-108	32 kW
180 mm	320-340 mm	101-127	35 kW

### FUNCTIONAL CHARACTERISTICS

MAXIMUM WORKING PRESSURE	bar	3
MAXIMUM WORKING TEMPERATURE	°C	93
MINIMUM DISTANCE FROM THE BURNER	mm	140
SURFACE TREATMENT	painted with silicone-aluminium mixture	

It is possible to have copper baffles (turbolators).

Many types of connections are available to satisfy your requests. Please don't hesitate to contact Valmex for connections or to customize your heat exchanger.